

## Paragliders Shock- and sustained loading test

Inspection certificat number: PG\_1823.2021

Test Report

### Manufacturer data

Manufacturer name: Niviuk Gliders  
 Representative: Dominique Cizeau  
 Street: C. Del Ter, 6-Nave D  
 Post code / place: 17165 La Cellera de Ter Girona  
 Country: Spain

### Sample data

Name: Kode P  
 Size: 26  
 Maximum weight in flight [kg]: 115  
 Serial number: KODE2611  
 Date of reception: 14.04.2021

### Test data

### Test Atmosphere AGL

|                |                   |     |            |
|----------------|-------------------|-----|------------|
| Place of test: | Yverdon (airport) | -1  | [°C]       |
| Date of test:  | 20.04.2021        | 75  | RH [%]     |
| Inspector:     | Alain Zoller      | 965 | [hPA]      |
|                |                   | 0.1 | Wind [m/s] |

### Shock loading test result <sup>(1)</sup>

Weak link used [daN]: 800  
 Visual inspection: No visible damage      Results: **POSITIVE**

### Weak link




| Instruments         | Validity    | Manufacturer | s/n    |
|---------------------|-------------|--------------|--------|
| Weak link           | continously | Tost         | n/a    |
| Ultrawire DSK99     | 29.10.2023  | Gottifredi   | n/a    |
| Geos n° 11 Skywatch | 18.06.2025  | JDC elec.    | Unit11 |

Inspection certificate number: **PG\_1823.2021**

**Detailed sustained loading test results**

|   |                |
|---|----------------|
| Cumulative duration at max load [s] :                     | <b>3</b>       |
| Max calculated load value for a duration of 3 sec. [N] :  | <b>1203.85</b> |
| Max calculated load value for a duration of 3 sec. [kg] : | <b>122.72</b>  |
| Max calculated load value with five peaks [N] :           | <b>n/a</b>     |
| Max calculated load value with five peaks [kg] :          | <b>n/a</b>     |
| Max calculated load value with 3 sec or five peaks [N] :  | <b>1203.85</b> |
| Max calculated load value with 3 sec or five peaks [kg] : | <b>122.72</b>  |

**Graphic sustained loading diagram**

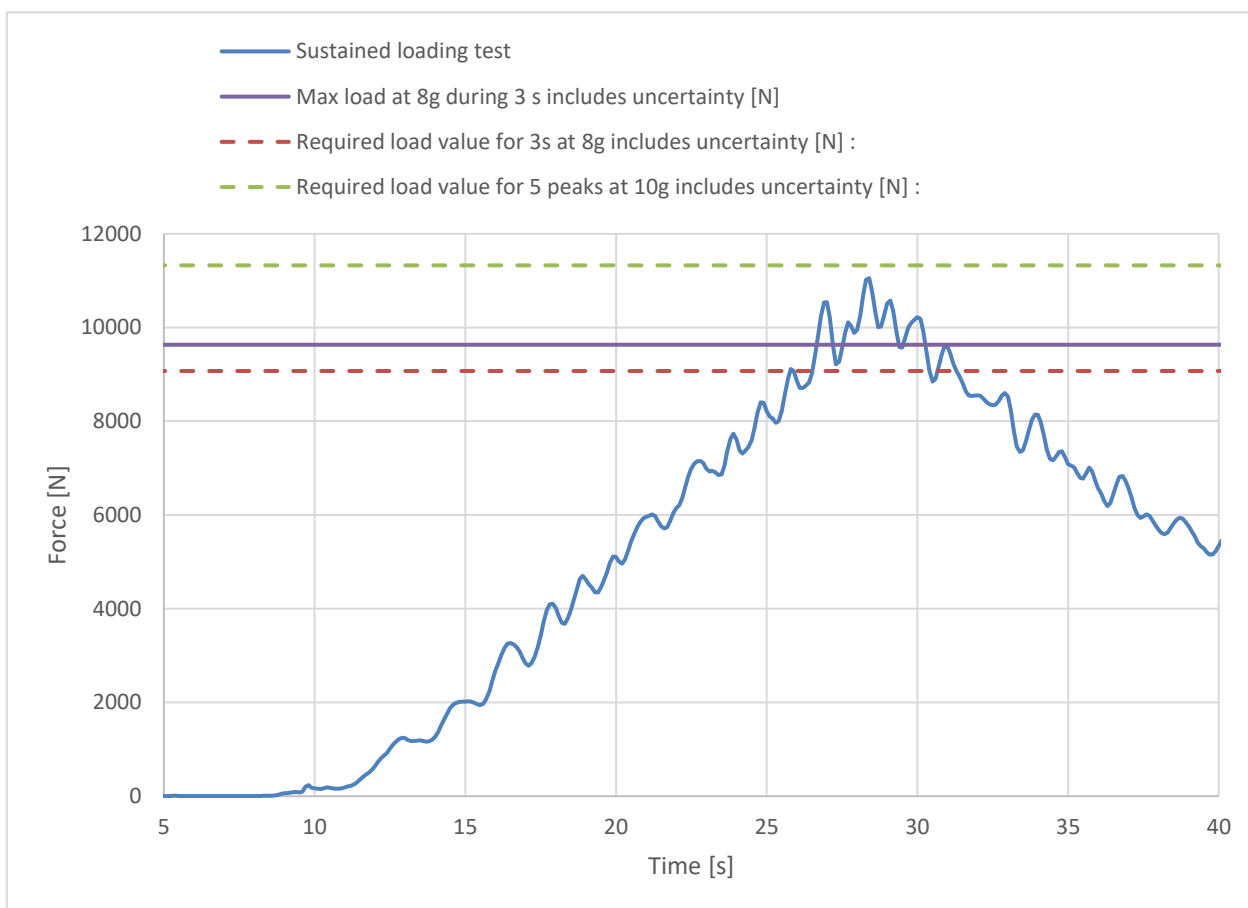

**Sustained loading test results <sup>(3)</sup>**

|   |                 |
|---|-----------------|
| Result :  | <b>POSITIVE</b> |
| Calculated max load value with 3 sec or five peaks [kg] : | <b>122.72</b>   |



Inspection certificate number: **PG\_1823.2021**

| Instruments        | Manufacturer | Validity   | S/N      |
|--------------------|--------------|------------|----------|
| Load sensor        | HBM          | 04.09.2023 | 31314652 |
| Geos n°11 Skywatch | JDC          | 18.06.2025 | Unit11   |

The validation of this test report is given by the signature of the test manager on inspection certificate 91.20

Air Turquoise SA has thoroughly tested the sample of paraglider mentioned above and certifies its conformity with the standards **EN 926-1:2015 | LTF NFL II-91/09**

(1) The paraglider is subjected to a shock load . Shock load is limited using a weak link according to the weight range of glider. The weak link breaks or 5 s has elapsed since the start of the shock load. The wing is then visually inspected for damage.

(2) Weak link value include the uncertainty for weight range test values / The uncertainty state is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor  $k = 2$ . The value of the measurand lies within the assigned range of values with a probability of 95%.

(3) The test specimen (sample) is attached to the electronic sensors on the tow vehicle.

A controller is positioned on the tow vehicle in order to operate the paraglider control lines to stabilize the wing.

The speed of the vehicle is increased as gradually as possible, enabling the controller to obtain satisfactory stabilisation of the flight path of the paraglider.

When the paraglider has stabilized, the speed is increased gradually until either:

- a) the measured load exceeds a load factor of eight times the maximum total weight in flight recommended by the manufacturer, for a minimum cumulative duration of 3 s; or
- b) five peaks separated by at least 0,3 s are obtained above ten times the maximum total weight in flight recommended by the manufacturer, in one run.

The calculated value include the value minus the uncertainty / The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor  $k = 2$ . The value of the measurand lies within the assigned range of values with a probability of 95%.