

Riser/Bridle strength test

Identification number: **MISC_238.2022**

Test Report

Manufacturer data

Manufacturer name: **Fly-market Flugsport-Zubehör GmbH & Co. KG**
 Representative: **Stefan Kurrle**
 Street: **Am Schönebach 3**
 Post code / Place: **87637 Eisenberg**
 Country: **Germany**

Sample data ⁽¹⁾

Name of riser: **Y-bridle FR**
 Serial number: **001**
 Date of reception: **29.11.2022**

Test data

Atmosphere AGL

Place of test: **Villeneuve** **20 [°C]**
 Date of test: **13.12.2022** **30 RH [%]**
 Inspector: **Nicolas Jacquod** **993 [hPa]**


Required values

Required load [N]: **24000** Minimum duration [s]: **0.3**

Results ⁽²⁾

Maximum load inc. uncertainty ⁽³⁾: **25423.3 [N]**
 Duration at the requested load: **0.6 [s]**
 Test result: **POSITIVE**

Graphic force diagram

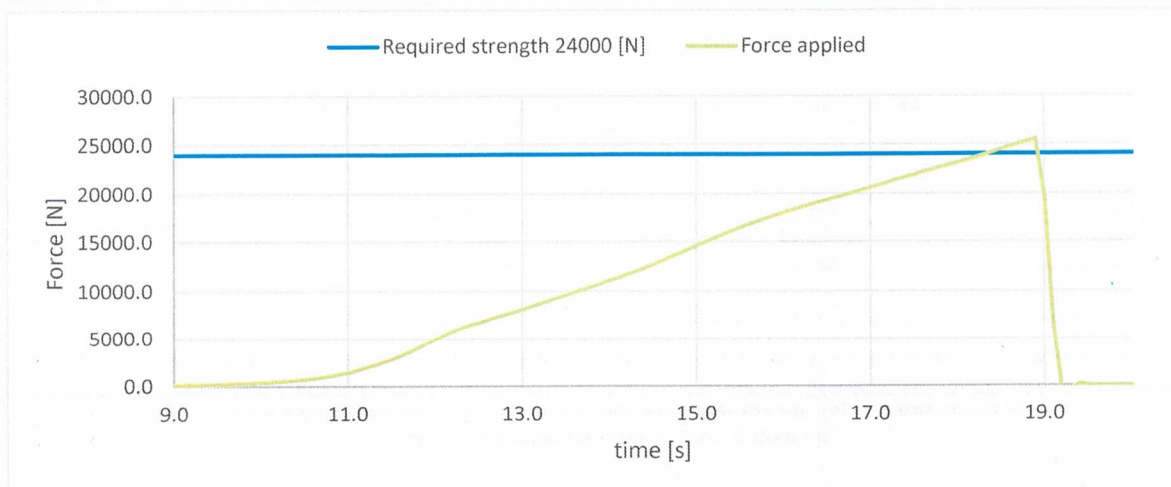



Identification number: **MISC_238.2022**

Fly-market Flugsport-Zubehör GmbH & Co. KG Y-bridle FR

Result summary

Maximum strength for riser, bridle: **25423.3 [N]**
 Duration at the requested load: **0.6 [s]**

Place of declaration: **Villeneuve**
 Date of issue: **19.12.2022**
 Managing director: **Andrea Wigger**

Signature:

This signature approves the validity of the test report

Air Turquoise SA has thoroughly tested the sample of emergency parachute mentioned above and certifies its conformity with the standards: **EN 1651:2018+A1:2020⁽⁴⁾ and NFL 2-565-20 chapter 6.1.4**

Instrument	Validity	Manufacturer	Type no.	S/N
Load sensor	04.09.2023	HBM	1-S9M/50KN-1	31314652
Geos n° 11 Skywatch	18.06.2025	JDC elec.	Geos n° 11	22

⁽¹⁾ Riser: lowest part of the the parachute system, which is connected to the harness. Bridle: connection between risers and harness, can also be a strap.

⁽²⁾ The connecting strap has to have a minimum load capacity of 24000 [N]. The exposed part of the connecting belt has to be protected against environmental factors.

⁽³⁾ Calculated value includes the value minus the uncertainty (on safe side) / The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor k = 2. The value of the measured lies within the assigned range of values with a probability of 95%.

⁽⁴⁾ This standards is NOT covered by accreditation D-IS-19457-01