

Riser/Bridle strength test

Identification number: MISC_317.2025

Test Report

Manufacturer data

Manufacturer name: AirDesign GmbH
Representative: Stephan Stiegler
Street: Rhomberstrasse 9, 4. Stock
Post code / Place: A-6067 Absam
Country: Austria

Sample data ⁽¹⁾

Name of riser: Rescue Risers Solo v2
Serial number: 2024 08 Rescue Risers Solo
Date of reception: 10.09.2024

Test data

Atmosphere AGL

Place of test: Villeneuve 25 [°C]
Date of test: 14.08.2025 49 RH [%]
Inspector: Alexandre Jofresa 983 [hPa]


Required values

Required load [N]: 24000 Minimum duration [s]: 0.3

Results ⁽²⁾

Maximum load inc. uncertainty ⁽³⁾: 24115.3 [N]
Duration at the requested load: 0.8 [s]
Test result: POSITIVE

Graphic force diagram

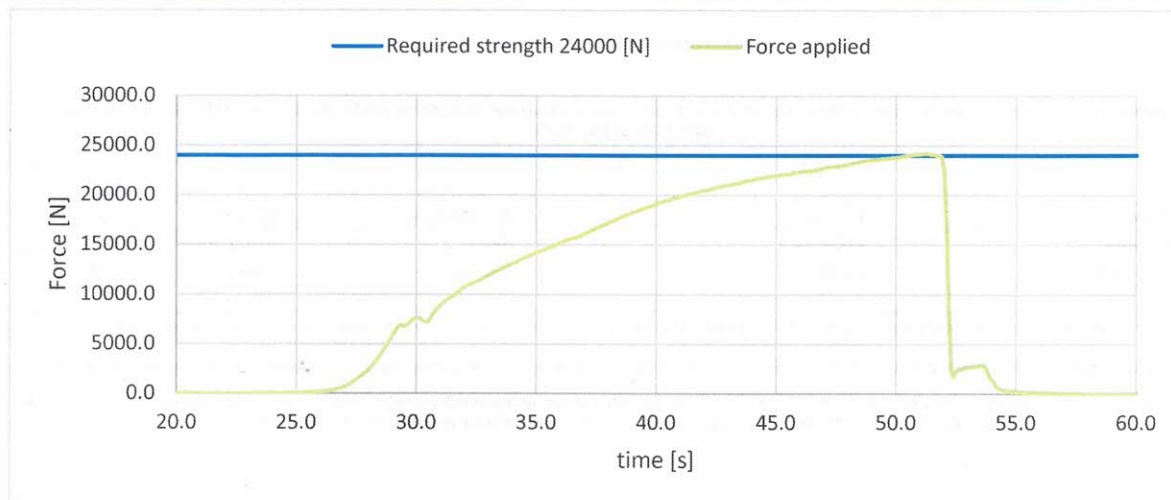

Identification number: **MISC_317.2025****AirDesign GmbH Rescue Risers Solo v2****Result summary**

Maximum strength for riser, bridle: **24115.3 [N]**
Duration at the requested load: **0.8 [s]**

Place of declaration: **Villeneuve**
Date of issue: **16.09.2025**
Managing director: **Andrea Wigger**

Signature:



This signature approves the validity of the test report

Air Turquoise SA has thoroughly tested the sample of emergency parachute mentioned above and certifies its conformity with the standards: **EN 1651:2018+A1:2020 and NF L 2024-2-785 chapter 6.1.4**

Instrument	Validity	Manufacturer	Type no.	S/N
Load sensor	23.08.2028	HBM	1-S9M/50KN-1	31314652
Geos n° 11 Skywatch	18.06.2025	JDC elec.	Geos n° 11	22

⁽¹⁾ Riser: lowest part of the the parachute system, which is connected to the harness. Bridle: connection between risers and harness, can also be a strap.

⁽²⁾ The connecting strap has to have a minimum load capacity of 24000 [N]. The exposed part of the connecting belt has to be protected against environmental factors.

⁽³⁾ Calculated value includes the value minus the uncertainty (on safe side) / The uncertainty stated is the expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor $k = 2$. The value of the measured lies within the assigned range of values with a probability of 95%.