



Test Report

This test report describes the test results of the below mentioned paragliding harness.

All the tests were carried out by:

Air Turquoise SA, official test laboratory of Switzerland

para-test.com



paragliding by air turquoise

Standards

Tests were carried out in conformity with the following standards:

- 2. DV LuftGerPV §1, Nr. 7 c (*note: in what follows this will be abbreviated by "LTF")
- European Standard EN1651 September 1999 (*note in what follows this will be abbreviated by "EN")
- European Standard EN12491 September 2001 (*note in what follows this will be abbreviated by "EN12491")

Harness details

Manufacturer:	AVA Sport Ltd.
Harness model:	Tanto
Size:	Medium
Harness Weight:	6.2
Maximum certified pilot	120 kg
Impact protection type:	Mousse bag
Harness type:	ABS

Test responsible:	Randi Eriksen
Test place:	Villeneuve
Test date:	July 9, 2010
Test room temp & humidity:	28° C; 43 %rel
Certification number EN:	PH 011.2010
Certification number LTF:	GZ 011.2010

page 1 of 4



Test summary

A. STRUCTURAL STRENGTH TESTS

A test plan was set up in order to execute the different tests in an efficient order. The table below summarizes this test plan together with the applicable standards and results.

Test ID	TESTED ?	Standard Ref.		TEST setup	Anchoring		Forces		Min. Test duration [sec]	Result
		EN	LTF		Attach - ment points	Dummy	Req. Load in g	Min. force [N]		
1	✓	5.3.2.1		Default flying position	2 main attachment points	Hip fixated	6g	6000	10	OK
2	✓	5.3.2.2	4.2.1.a				9g	9000	5	OK
3	✓		4.2.1.b	Default, landing position	2 main att. points	Hip fixated, landing conf.	6g	6000	10	OK
4	✓	5.3.2.7					15g	15000	5	OK
5	✓		4.2.1.a rescue	Rescue	2 rescue att. Pnts.	Hip fixated	9g	9000	10	OK
6	✓	5.3.2.4					15g	15000	5	OK
7	✓		4.2.1.b rescue	Rescue, landing		Hip fixated, landing conf.	6g	6000	10	OK
8	✓	5.3.2.3		One riser	ONE main att.	1 central hip fixation	6g	6000	10	OK
9		5.3.2.5	4.2.1.d	Towing	2 main att. + 2 tow att.	None	3g 5g	3000 5000	10	n/t
10	✓	5.3.2.6		Default, Negatif	One main att.	Head fix.	4.5g	4500	10	OK
11	✓		4.2.1.c	Upside down	2 main att. downw.	Head fix.	6g	6000	10	OK
12	✓		4.2.1.c rescue	Upside down rescue	2 rescue att. downw.		6g	6000	10	OK

B. HARNESS PROTECTION SHOCK TEST

Most paraglider harnesses are equipped with a protection device that damps the shock on the pilot's spine during a hard landing.

Shock impact tests have to be executed on these harnesses in order to prove the damping characteristics of it.



Test ID	TESTED ?	Standard Ref.:	TEST setup	Anchoring		Impact			Result		
		LTF		Attachment points	Dummy	Max. tolerated peak impact in g	Max Peak impact measured	Impact duration of +38 g (if any) recorded:		Impact duration of +20 g (if any) recorded:	
PROTECT 1	✓	5.1.1	Default flying position	Test dummy is attached to the harness like a pilot in flight.			+50g	37.4 g	0	17 ms	OK

C. RESCUE DEPLOYMENT RESISTANCE TEST

The deployment of the rescue system has to be ensured in all circumstances of flight. This test is to verify whether the force needed to deploy is in between reasonable limits.

Test ID	TESTED ?	Standard Ref.	TEST setup	Anchoring		Force for single hand deployment			Result	
		LTF		Attachment points	Dummy	Min. force [N]	max. force [N]	Resistance measured [daN]		
Resc depl	✓	6.1.5	Default flying position	Test responsible is attached to the harness like a pilot in flight. (no dummy required)			20 N	70 N	n/t	OK

D. RESCUE DEPLOYMENT STRAP STRENGTH TEST

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal use. During this test is verified, whether this connection fulfill the requirements.

Test ID	TESTED ?	Standard Ref.	TEST setup	Minimum force [N]	Min. Test duration [s]	Breaking resistance measured	Result	
		LTF						EN 12491
Resc strap	✓	6.1.8	5.3.2	Connection strap in tensile testing machine	700N	10	n/t	OK



After careful examination as explained in above mentioned test reports (from page 2 to page 18), the undersigned persons declare that the harness:

**AVA Sport Ltd.
Tanto
Medium**

complied with:

- **European Standard EN 1651 September 1999**

And / or (if tested)

- **European Standard EN 12491 March 2001**

And / or (if tested)

- **2. DV LuftGerPV §1, Nr. 7 c**

Villeneuve, July 9, 2010

Randi Eriksen

Place, Date

Test responsible

page 4 of 4



Annex: detailed test reports

Harness Test		Test ID 1
Item:	Tanto	
Manufacturer	AVA Sport Ltd.	
Test place & date:	Villeneuve	July 9, 2010
Test responsible:	Randi Eriksen	
Temp. [°C] & Humidity:	28° C; 43 %rel	
Maximum certified pilot weight [kg]:	120	kg
Standard	EN 1651 & 2. DV LuftGerPV §1, Nr. 7 c	
Test standard §:	5.3.2.1 (EN) & 4.2.1 a (LTF DV)	
Test setup:	Default flying position	
Anchoring: Attachment points:	Both main riser attachments (3, 4)	
Dummy:	Default, hip fixed (7, 8)	
Required load in g :	9g (EN: 6g)	
Minimum load [N]:	9000 N (EN: 6000 N)	
Required test load in kg:	1080	kg
Min. duration [s]:	10 s	

Results	
Duration of maintained min. load [s]:	11.8 s
Any signs of structural failure after this test:	No visible failure
Test result:	Passed

Graph:

Time (s)	Force (daN)
0	0
5	50
10	100
15	200
20	600
25	900
30	1200
35	1100
40	1100
41	200
45	50





Harness Test		Test ID 2	
Item:	Tanto		
Manufacturer	AVA Sport Ltd.		
Test place & date:	Villeneuve	July 9, 2010	
Test responsible:	Randi Eriksen		
Temp. [°C] & Humidity:	28° C; 43 %rel		
Maximum certified pilot weight [kg]:	120	kg	
Standard	EN 1651		
Test standard §:	5.3.2.2		
Test setup:	Default flying position		
Anchoring: Attachment points:	Both main riser attachments (3, 4)		
Dummy:	Default, hip fixed (7, 8)		
Required load in g:	15	g	
Min load [N]:	15 000 N		
Required test load in kg:	1800	kg	
Min. duration [s]:	5s		
Results			
Duration of maintained min. load [s]:	6.1 s		
Any signs of structural failure after this test:	No visible failure		
Test result:	Passed		
Graph:			



Harness Test

Test ID 3


Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg

Standard: 2. DV LuftGerPV §1, Nr. 7 c
 Test standard §: 4.2.1.b

Test setup: Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

Anchoring: Attachment points: Both of the main riser attachments attached (3 and 4);
 Dummy: Default, hip fixed (7, 8)

Required load in g: 6 g
 Min load [N]: 6000 N
 Required test load in kg: **720 kg**
 Min. duration [s]: 10 s




Results

Duration of maintained min. load [s]: **11 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

Graph:

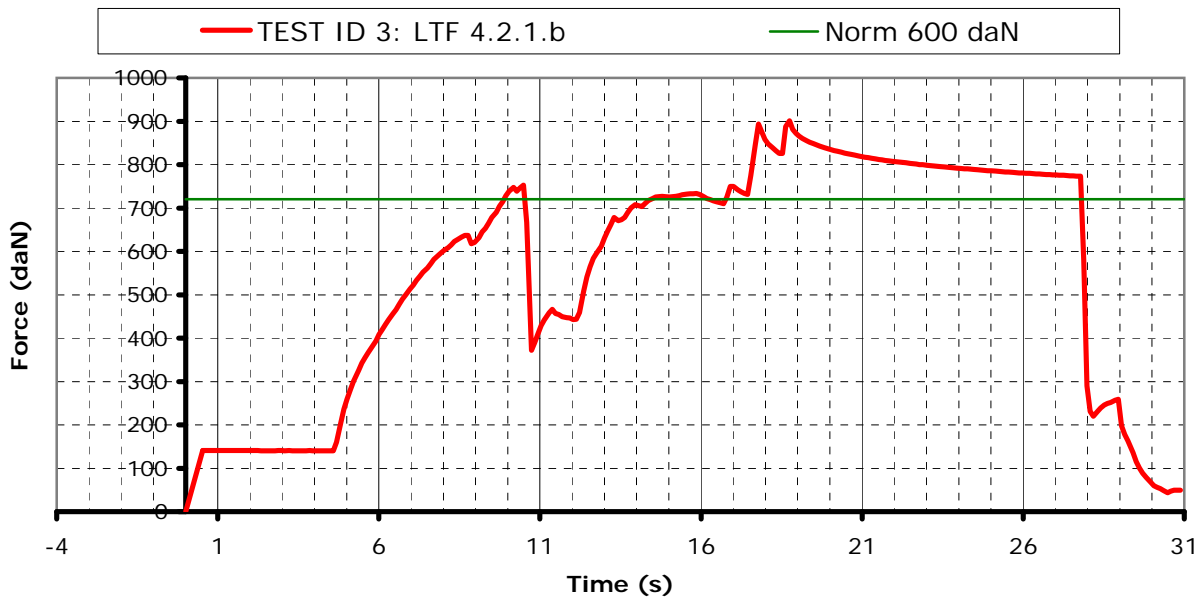

Harness Test **Test ID 4**


Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg

Standard: EN 1651
 Test standard §: EN 5.3.2.7

Test setup: Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

Anchoring: Attachment points: Both of the main riser attachments attached (3 and 4);
 Dummy: Default, hip fixed (7, 8)


Required load in g: 15 g
 Min load [N]: 15 000 N
 Required test load in kg: **1800 kg**
 Min. duration [s]: 5 s



Results

Duration of maintained min. load [s]: **6.5 s**
 Any signs of structural failure after this test: **No visible failure**
 Test result: **Passed**

Graph:

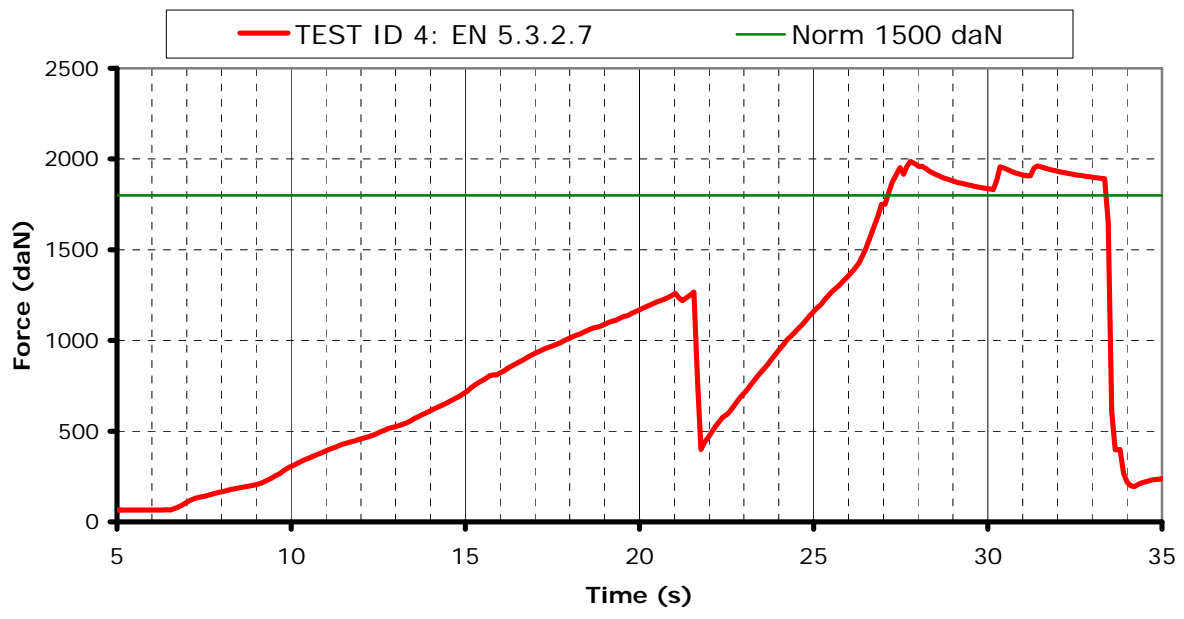

The management system governing the provision of this test service is ISO 9001 certified:




Harness Test

Test ID 5

Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg

Standard: 2. DV LuftGerPV §1, Nr. 7 c
 Test standard §: 4.2.1.a rescue
 Test setup: Rescue attachments
 Anchoring: Attachment points: Rescue riser attachments (1,2)
 Dummy: Hip fixed (7, 8)
 Required load in g: 9 g
 Min load [N]: 9 000 N
 Required test load in kg: **1080 kg**
 Min. duration [s]: 10 s




Results

Duration of maintained min. load [s]: **11 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**


Graph:

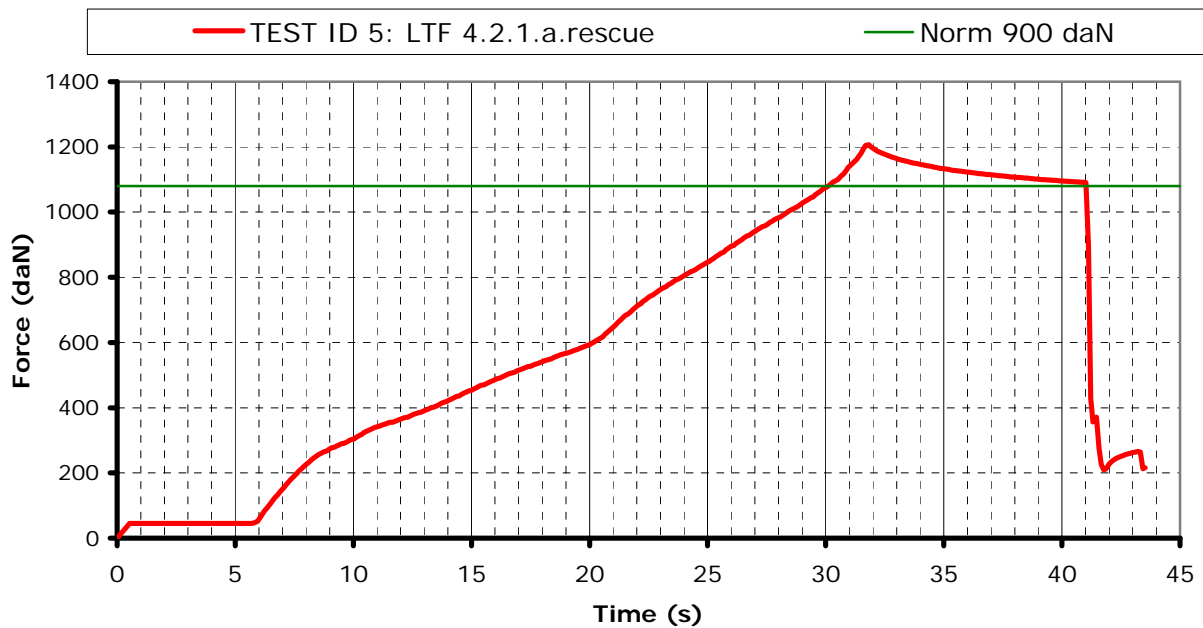

Harness Test **Test ID 6**

Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg


Standard: EN 1651
 Test standard §: 5.3.2.4
 Test setup: Rescue attachments
 Anchoring: Attachment points: Rescue riser attachments (1,2)
 Dummy: Hip fixed (7, 8)
 Required load in g: 15 g
 Min load [N]: 15 000 N
 Required test load in kg: **1800** kg
 Min. duration [s]: 5 s



Results

Duration of maintained min. load [s]: **6.2s**
 Any signs of structural failure after this test: **No visible failure**
 Test result: **Passed**

Graph:

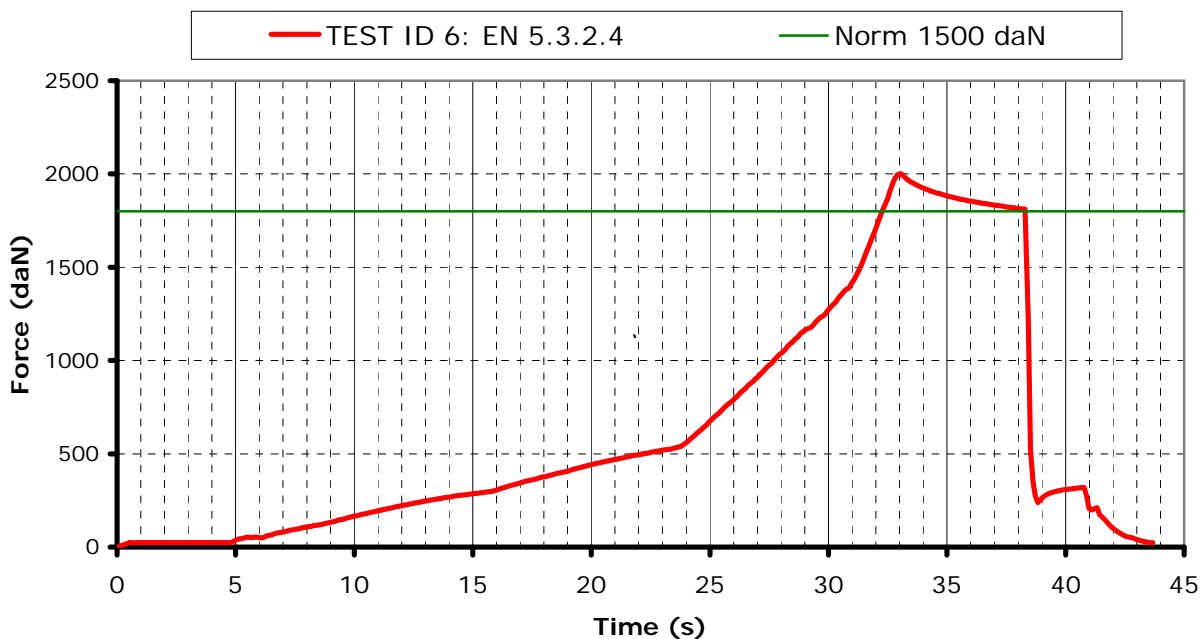



Harness Test		Test ID 7
Item:	Tanto	
Manufacturer	AVA Sport Ltd.	
Test place & date:	Villeneuve	July 9, 2010
Test responsible:	Randi Eriksen	
Temp. [°C] & Humidity:	28° C; 43 %rel	
Maximum certified pilot weight [kg]:	120	kg
Standard	2. DV LuftGerPV §1, Nr. 7 c	
Test standard §:	4.2.1.b rescue	
Test setup:	Flying position before landing: seat board (11) in landing position, leg straps (10) closed.	
Anchoring: Attachment points:	Both of the rescue riser attachments attached (1 and 2);	
Dummy:	Default, hip fixed (7, 8)	
Required load in g:	6	g
Min load [N]:	6 000 N	
Required test load in kg:	720	kg
Min. duration [s]:	10 s	

Results	
Duration of maintained min. load [s]:	11.7 s
Any signs of structural failure after this test:	No visible failure
Test result:	Passed

Graph:


Time (s)	Force (daN)
5	0
7	0
9	0
11	0
13	600
14	1100
15	1050
15.5	1600
17	1450
19	200
19.5	250



Harness Test **Test ID 8**

Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg


Standard: EN 1651
 Test standard §: 5.3.2.3
 Test setup: Only one riser attached
 Anchoring: Attachment points: One main riser attachments (3)
 Dummy: Hip fixed (7, 8 -> 12)
 Required load in g: 6 g
 Min load [N]: 6 000 N
 Required test load in kg: **720 kg**
 Min. duration [s]: 10 s



Results

Duration of maintained min. load [s]: **11.4 s**
 Any signs of structural failure after this test: **No visible failure**
 Test result: **Passed**

Graph:

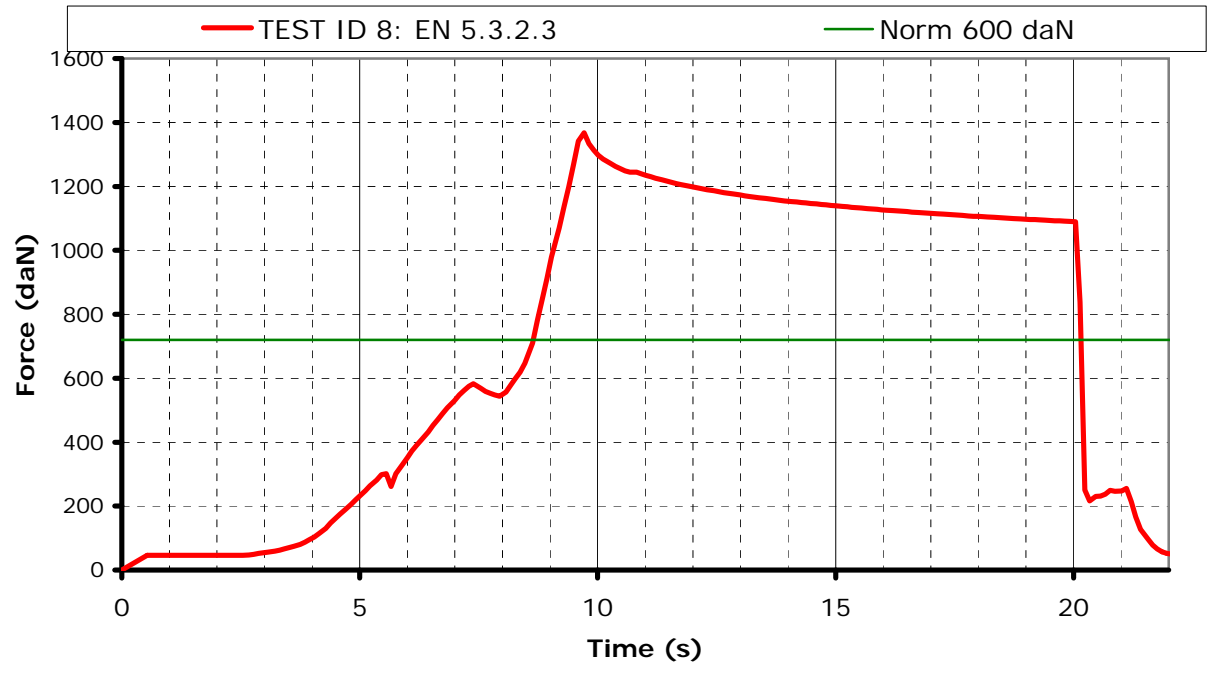

The management system governing the provision of this test service is ISO 9001 certified:




Harness Test

Test ID 10

Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg


Standard: EN 1651
 Test standard §: 5.3.2.6
 Test setup: Normal flying position in NEGATIF
 Anchoring: Attachment points: ONE of the main riser attachments attached downwards(3 or 4);
 Dummy: Dummy anchored at the head position (9)
 Required load in g: 4.5 g
 Min load [N]: 4500 N
 Required test load in kg: **540 kg**
 Min. duration [s]: 10 s



Results

Duration of maintained min. load [s]: **10 s**
 Any signs of structural failure after this test: **No visible failure**
 Test result: **Passed**

Graph:

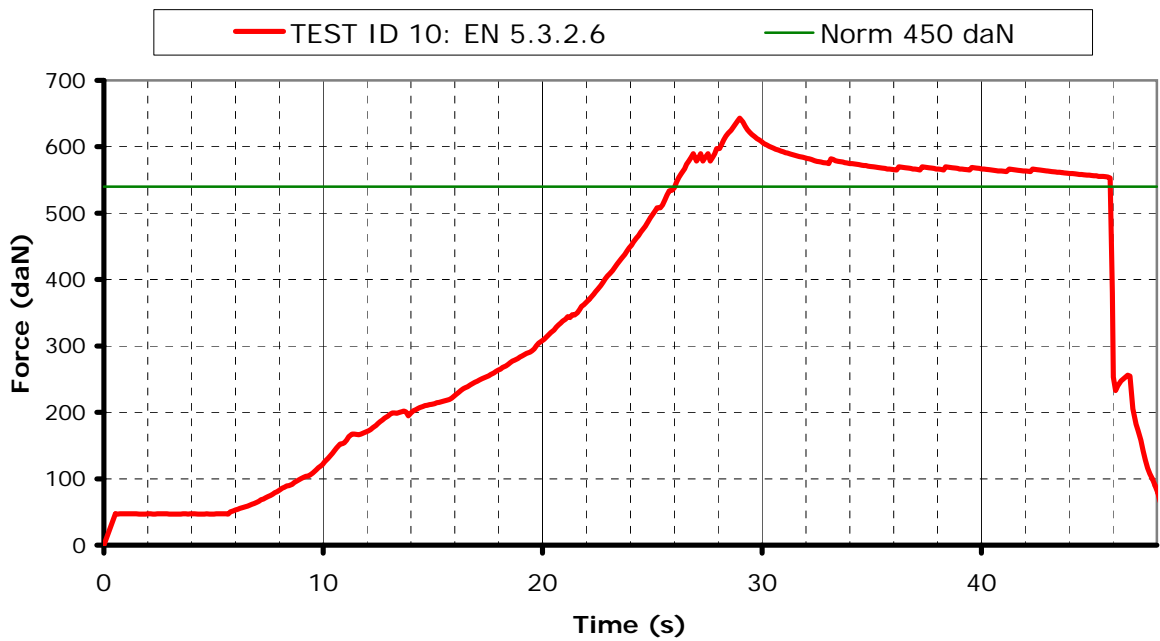

Harness Test

Test ID 11


Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg

Standard: 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 4.2.1.c

Test setup: Pilot upside down flying position

Anchoring: Attachment points: Both of the main riser attachments attached downwards (3 and 4);
 Dummy: Dummy anchored at the head position (9)

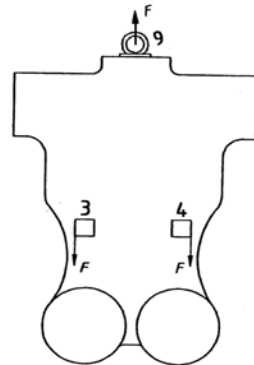

Required load in g: 6 g
 Min load [N]: 6 000 N
 Required test load in kg: **720 kg**
 Min. duration [s]: 10 s


Results

Duration of maintained min. load [s]: **11.1 s**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**


Graph:

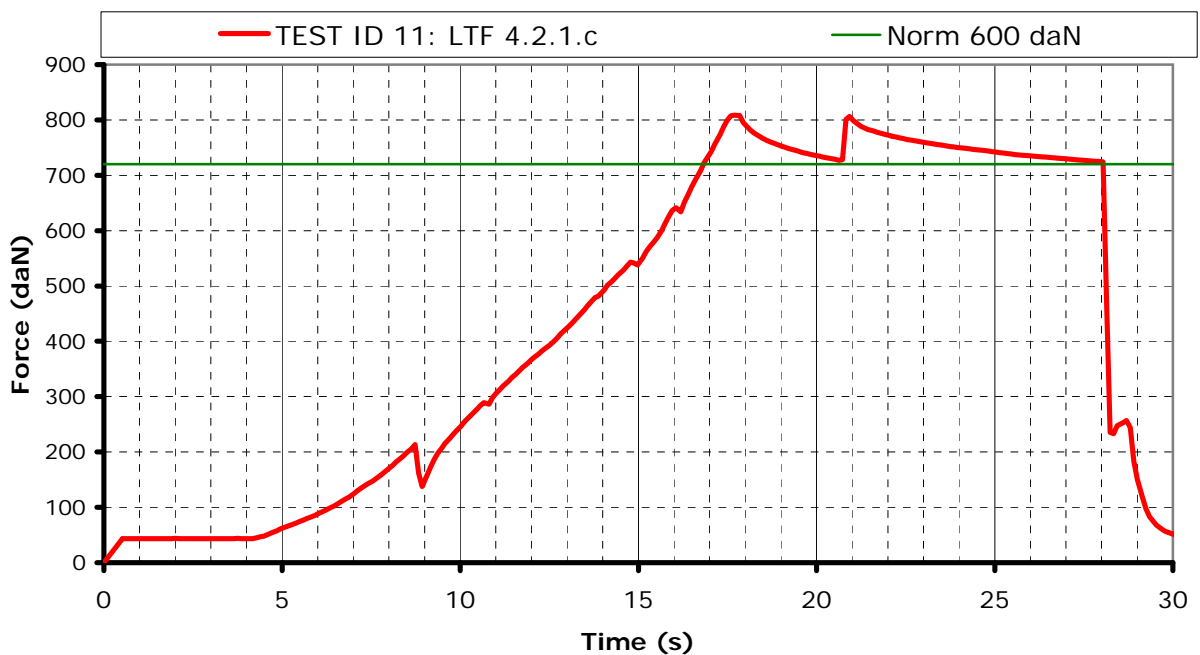

Harness Test **Test ID 12**

Item: Tanto
Manufacturer: AVA Sport Ltd.
Test place & date: Villeneuve July 9, 2010
Test responsible: Randi Eriksen
Temp. [°C] & Humidity: 28° C; 43 %rel
Maximum certified pilot weight [kg]: 120 kg


Standard: 2. DV LuftGerPV §1, Nr. 7 c
Test standard §: 4.2.1.c rescue
Test setup: Pilot upside down flying position
Anchoring: Attachment points: Both of the rescue riser attachments attached downwards (1 and 2);
Dummy: Dummy anchored at the head position (9)
Required load in g: 6 g
Min load [N]: 6 000 N
Required test load in kg: **720 kg**
Min. duration [s]: 10 s

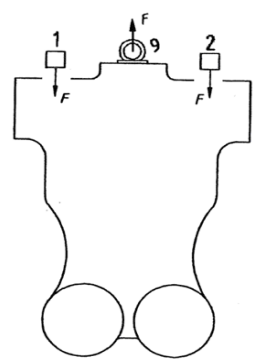

Results

Duration of maintained min. load [s]: **11 s**
Any signs of structural failure after this test: **No visible failure**
Test result: **Passed**

Graph:

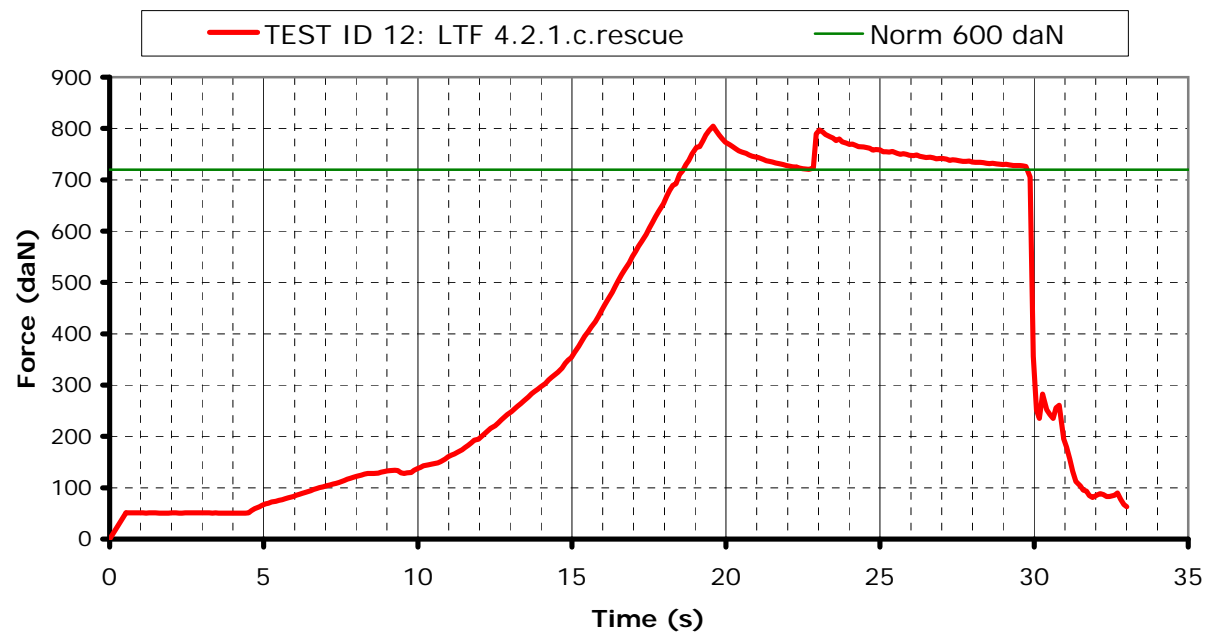



Protector shock test **Test ID Protect 1**

Item: Tanto
Manufacturer: AVA Sport Ltd.
Test place & date: Villeneuve July 9, 2010
Test responsible: Randi Eriksen
Temp. [°C] & Humidity: 28° C; 43 %rel
Maximum certified pilot weight [kg]: 120 kg

Standard 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 5.1.1

Test setup: Harness attached to protector test dummy, in a similar way like a real pilot in flight.
 Impact will be simulated by dropping the dummy from a certain height (with and without reserve).
 To simulate the "in-flight" conditions, the airbag is inflated with pressurized air equalling an airspeed of 7m/s. Inflation has to be stopped at least 5 sec before impact.
 Impact will be measured by an accelerometer mounted on the dummy. (Impact measured in g's)

Requirements:

- Minimun height:** 1.65 m (between lowest point test dummy and impact surface)
- Impact requirements:**
 - +50g as absolute maximum;
 - +38g during less than 7 msec;
 - +20g during less than 25 msec.
- Repetitions:** The test will be performed 2 times, minimum 1 hour and maximum 2 hours after the first impact (with airbag protectors this pause is not necessary). The 2 Max-values should not differ more than 20%

Results

Shock test 1:

<p>Impact at a height of 1.65m:</p> <p>Impact duration of+ 38 g (if any):</p> <p>Impact duration of +20 g (if any):</p>	<p>37.4 g</p> <p>0</p> <p>17 ms</p>	
---	-------------------------------------	--

Shock test 2:


<p>Impact at a height of 1.65m:</p> <p>Impact duration of+ 38 g (if any):</p> <p>Impact duration of +20 g (if any):</p>	<p>43.5 g</p> <p>0</p> <p>19 ms</p>	
---	-------------------------------------	--

Test Result: Passed






Graph 1:

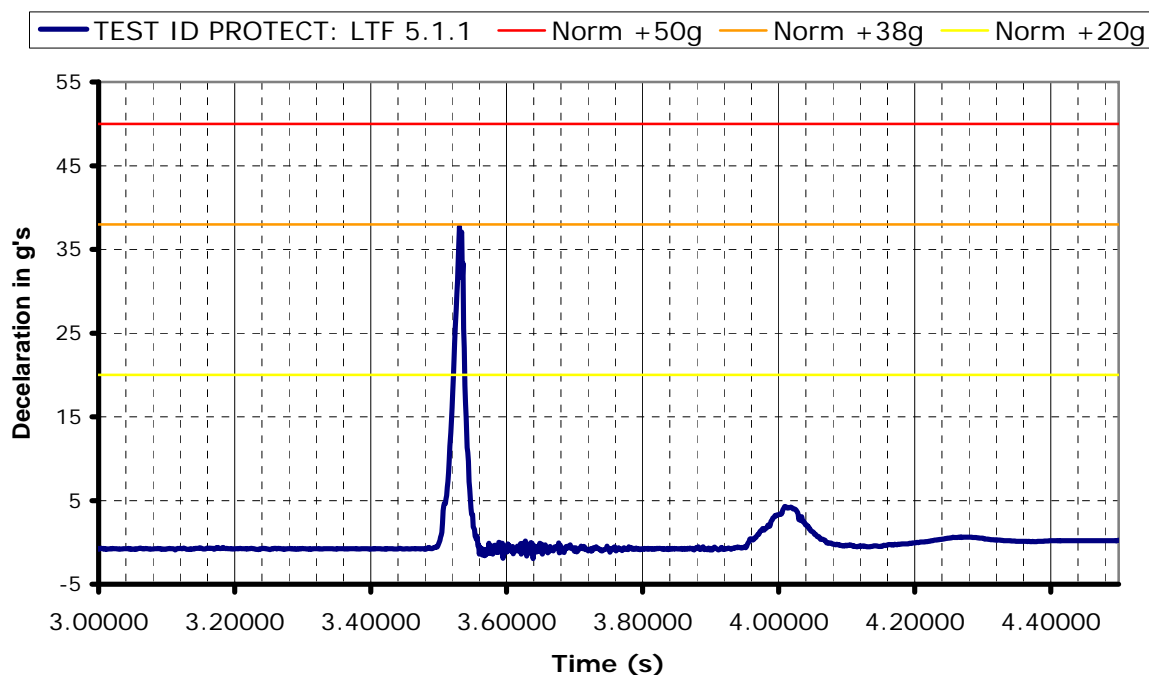

Graph 2:

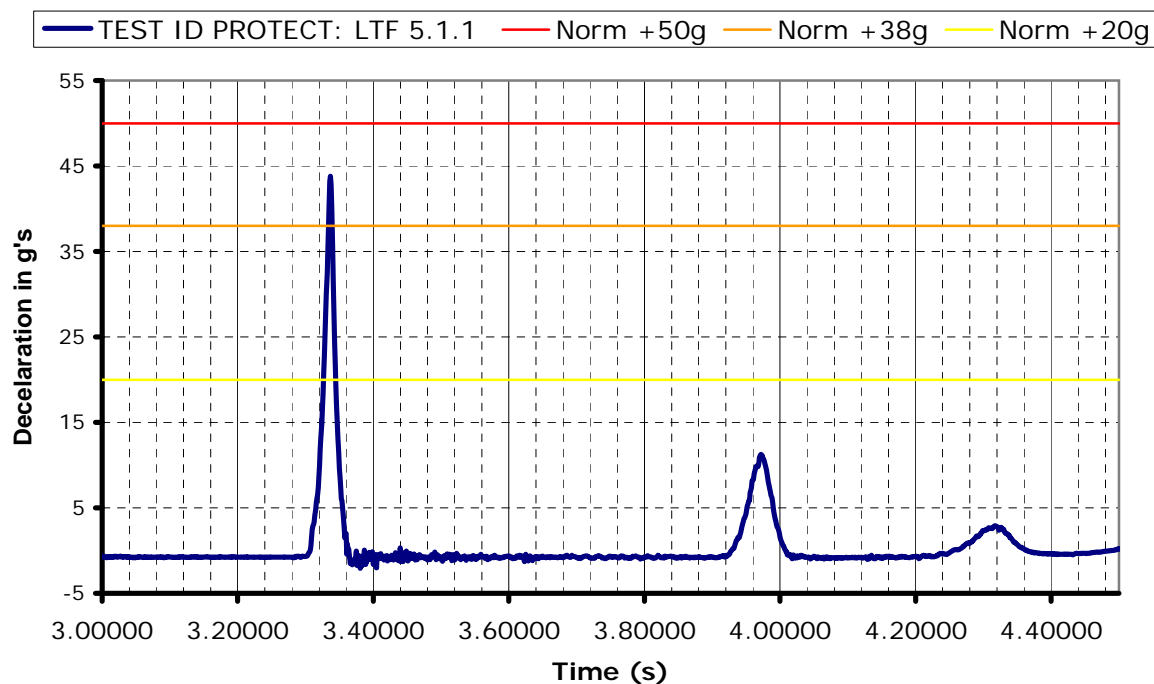



Rescue deployment resistance test		Test ID resc
Item:	Tanto	
Manufacturer	AVA Sport Ltd.	
Test place & date:	Villeneuve	July 9, 2010
Test responsible:	Randi Eriksen	
Temp. [°C] & Humidity:	28° C; 43 %rel	
Maximum certified pilot weight [kg]:	120	kg
Standard	2. DV LuftGerPV §1, Nr. 7 c	
Test standard §:	6.1.5	
Test setup:	<p>The deployment of the rescue system has to be ensured in all circumstances, especially with a damaged glider.</p> <p>The pilot has to be able to deploy the rescue chute with a single pull out of the outer container, single handed and in an anatomical favorable direction.</p> <p>In order to simulate this, the test responsible deploys the rescue seated in the harness. In a similar way as in real flight. The deployment resistance is approximately measured by the load cell, which is placed between the hand of the test responsible and the rescue hand grip.</p> <p>On the other hand inadvertent deployment has to be fairly remote. Therefore a shear link has to withstand a minimum load.</p>	
Requirements:	<p>Max force for single hand deployment:</p> <p>Min force to prevent unwanted opening:</p>	<p>approx. 70 N</p> <p>approx. 20 N</p>
Results		
Measured peak to peak required force for deployment [daN]:		6.2
Comment:	Passed	
Graph:		

The management system governing the provision of this test service is ISO 9001 certified:



Air Turquoise S.A. – Certification of paraglider equipment
 Tested in accordance with EN 1651 : 1999 and 2.DV LuftGerPV §1, Nr. 7 c



Rescue deployment strap strength test

Test ID resc strap

Item: Tanto
 Manufacturer: AVA Sport Ltd.
 Test place & date: Villeneuve July 9, 2010
 Test responsible: Randi Eriksen
 Temp. [°C] & Humidity: 28° C; 43 %rel
 Maximum certified pilot weight [kg]: 120 kg

Standard: EN 12491 & 2. DV LuftGerPV §1, Nr. 7 c

Test standard §: 5.3.2 (EN 12491) & 6.1.8 (LTF)

Test setup: The handgrip of the outer container has to be connected to the inner container with a removable loop in a way that it is possible to use the inner container with different types of outer containers.
 The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal operation.
 In order to verify this, the connection is tested on its tensile strength by a default tensile testing setup.
 In addition to this the breaking resistance will also be measured.

Requirements: Min. tensile strenght for 10 s: 700 N (= 70daN)

Results

Duration of maintained load [s]: **ok**

Breaking resistance [daN]: **243.5**

Comment: **Passed**

Graph:

