



Test Report

This test report describes the test results of the below mentioned paragliding harness.

All the tests were carried out by:

Air Turquoise SA, official test laboratory of Switzerland.

para-test.com



paragliding by air turquoise

Standards

Tests were carried out in conformity with the following standards:

- NACHRICHTEN FÜR LUFTFAHRER 57 DEZEMBER 2009 **NfL II 91 / 09** (*note: in what follows this will be abbreviated by "LTF")
- European Standard EN1651 September 1999 (*note in what follows this will be abbreviated by "EN")
- European Standard EN12491 September 2001 (*note in what follows this will be abbreviated by "EN12491")

Harness details

Manufacturer:	DUDEK Paragliders S.J.
Harness model / Size:	Jazz
SN:	H-02246
Harness Weight:	3.25 kg
Maximum certified pilot weight:	100 kg
Impact protection type:	Mousse bag
Harness type:	ABS

Test responsible:	Alain Zoller
Test place:	Villeneuve
Test date:	February 17, 2015
Test room temp & humidity:	21,6° C; 35 %rel
Certification number EN:	PH 119.2015
Certification number LTF:	GZ 119.2015



Test summary

A. STRUCTURAL STRENGTH TESTS

A test plan was set up in order to execute the different tests in an efficient order. The table below summarizes this test plan together with the applicable standards and results.

Test ID	TESTED ?	Standard Ref.		TEST setup	Anchoring		Forces		Min. Test duration [sec]	Result
		EN 1651	LTF		Attach - ment points	Dummy	Req. Load in g	Min. force [N]		
1	✓	5.3.2.1	4.2.1.a	Default flying position	2 main attachment points	Hip fixated	6g	6000	10	OK
2	✓	5.3.2.2					9g	9000		
3	✓	5.3.2.7	4.2.1.b	Default, landing position	2 main att. points	Hip fixated, landing conf.	6g	6000	10	OK
4	✓						15g	15000		
5		5.3.2.4	4.2.1.a rescue	Rescue	2 rescue att. Pnts.	Hip fixated	9g	9000	10	n/a
6			15g				15000	5		
7		5.3.2.3	4.2.1.b rescue	Rescue, landing	ONE main att.	1 central hip fixation	6g	6000	10	OK
8	✓		4.2.1.d				Towing	2 main att. + 2 tow att.		
9		5.3.2.5	4.5g	5000						
10	✓	5.3.2.6	4.2.1.c	Default, Negatif	One main att.	Head fix.	4.5g	4500	10	OK
11	✓	Upside down					2 main att. downw.	6g		
12		4.2.1.c rescue	Upside down rescue	2 rescue att. downw.	Head fix.	6g	6000	10	n/a	
						6g	6000			10

B. HARNESS PROTECTION SHOCK TEST

Most paraglider harnesses are equipped with a protection device that damps the shock on the pilot's spine during a hard landing.

Shock impact tests have to be executed on these harnesses in order to prove the damping characteristics of it.



Test ID	TESTED ?	Standar d Ref.:	TEST setup	Anchoring		Impact					
		LTF		Attach- ment points	Dummy	Max. tolerated peak impact in g	Max Peak impact measured	Impact duration of + 38 g (if any) recorded:	Impact duration of + 20 g (if any) recorded:	Result	
PRO TECT 1	✓	5.1.1	Default flying position	Test dummy is attached to the harness like a pilot in flight.			+50g	36.95	0	18.48	OK

C. RESCUE DEPLOYMENT RESISTANCE TEST

The deployment of the rescue system has to be ensured in all circumstances of flight. This test is to verify whether the force needed to deploy is in between reasonable limits.

Test ID	TESTED ?	Standar d Ref.	TEST setup	Anchoring		Force for single hand deployment			Result	
		LTF		Attach- ment points	Dummy	Min. force [N]	max. force [N]	Resistance measured [daN]		
Resc depl	✓	6.1.5	Default flying position	Test responsible is attached to the harness like a pilot in flight. (no dummy required)			20 N	70 N	n/t	OK

D. RESCUE DEPLOYMENT STRAP STRENGTH TEST

The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal use. During this test is verified, whether this connection fulfill the requirements.

Test ID	TESTED ?	Standard Ref.		TEST setup	Minimum force [N]	Min. Test durati on [s]	Breaking resistance measured	Result
		LTF	EN 12491					
Resc strap	✓	6.1.8	5.3.2	Connection strap in tensile testing machine	700N	10	n/t	OK



After careful examination as explained in above mentioned test reports (from page 2 to page 18), the undersigned persons declare that the harness:

DUDEK Paragliders S.J.

Jazz

H-02246

Complied with:

- **European Standard EN 1651 September 1999**

And / or (if tested)

- **European Standard EN 12491 March 2001**

And / or (if tested)

- **NACHRICHTEN FÜR LUFTFAHRER 57 DEZEMBER 2009 nFl II 91 / 09**

Villeneuve, February 17, 2015

Place, Date

Test responsible


EN & LU Testing center
Alain Zoller

www.para-test.com




Annex: detailed test reports

Harness Test

Test ID 1

Item: Jazz
Manufacturer: DUDEK Paragliders S.J.
Test place & date: Villeneuve February 17, 2015
Test responsible: Alain Zoller
Temp. [°C] & Humidity: 21,6° C; 35 %rel
Maximum certified pilot weight [kg]: 100 kg


Standard: EN 1651 & nFl II 91 / 09
Test standard §: 5.3.2.1 (EN) & 4.2.1 a (LTF DV)
Test setup: Default flying position
Anchoring: Attachment points: Both main riser attachments (3, 4)
Dummy: Default, hip fixed (7, 8)
Required load in g : 9g (EN: 6g)
Minimum load [N]: 9000 N (EN: 6000 N)
Required test load in kg: **917 kg**
Min. duration [s]: 10 s



Results

Duration of maintained min. load [s]: **< 10 sec.**
Any signs of structural failure after this test: **No visible failure**
Test result: **Passed**

Graph:

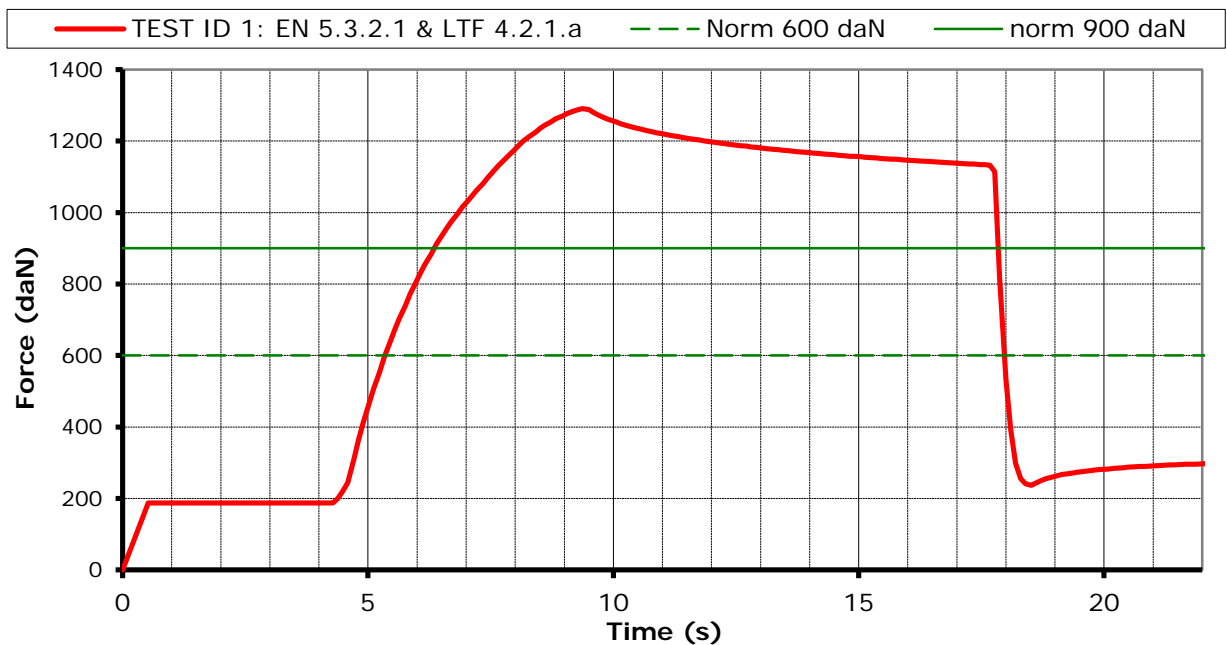



Harness Test

Test ID 2

Item: Jazz
 Manufacturer: DUDEK Paragliders S.J.
 Test place & date: Villeneuve February 17, 2015
 Test responsible: Alain Zoller
 Temp. [°C] & Humidity: 21,6° C; 35 %rel
 Maximum certified pilot weight [kg]: 100 kg

Standard: EN 1651

Test standard §: 5.3.2.2

Test setup: Default flying position

Anchoring: Attachment points: Both main riser attachments (3, 4)


Dummy: Default, hip fixed (7, 8)

Required load in g: 15 g

Min load [N]: 15 000 N

Required test load in kg: **1529 kg**

Min. duration [s]: 5s




Results

Duration of maintained min. load [s]: **< 5 sec.**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

Graph:

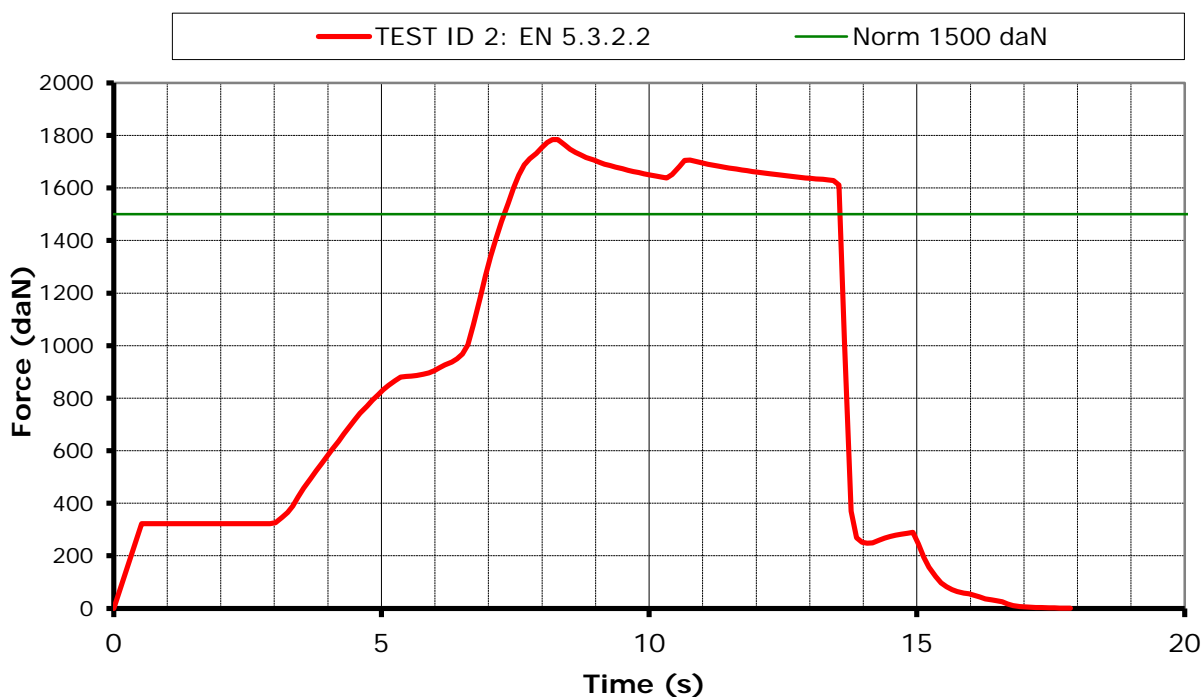



Harness Test

Test ID 3


Item: Jazz
Manufacturer: DUDEK Paragliders S.J.
Test place & date: Villeneuve February 17, 2015
Test responsible: Alain Zoller
Temp. [°C] & Humidity: 21,6° C; 35 %rel
Maximum certified pilot weight [kg]: 100 kg

Standard: NfL II 91 / 09
Test standard §: 4.2.1.b

Test setup: Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

Anchoring: Attachment points: Both of the main riser attachments attached (3 and 4);
Dummy: Default, hip fixed (7, 8)

Required load in g: 6 g
Min load [N]: 6000 N
Required test load in kg: 612 kg
Min. duration [s]: 10 s




Results

Duration of maintained min. load [s]: < 10 sec

Any signs of structural failure after this test: No visible failure

Test result: Passed

Graph:

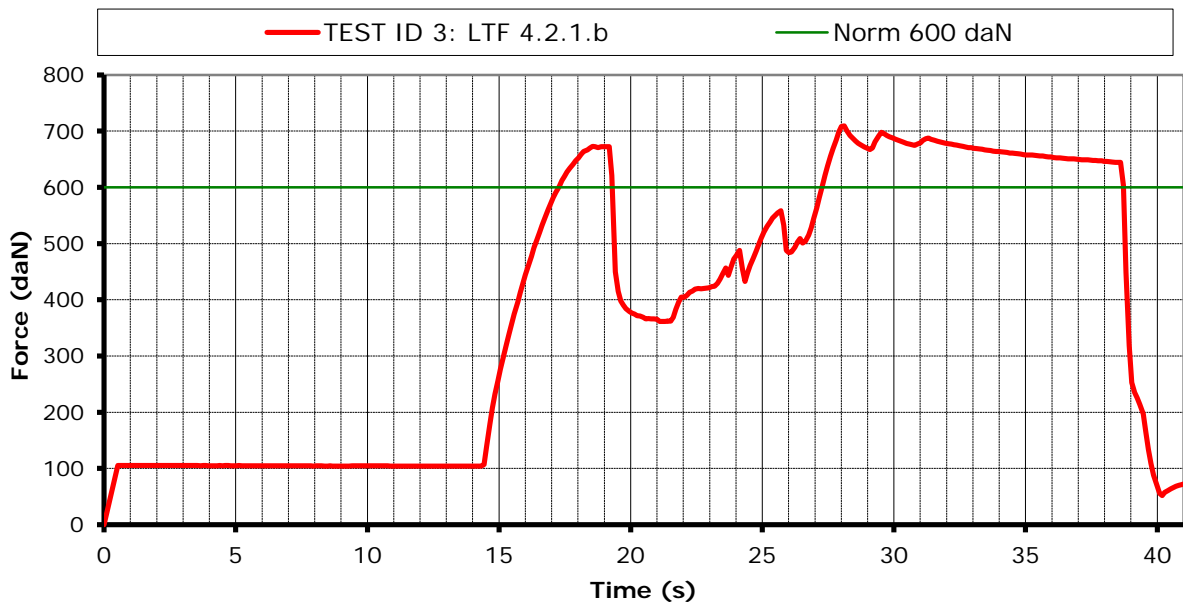



Harness Test

Test ID 4

Item: Jazz
Manufacturer: DUDEK Paragliders S.J.
Test place & date: Villeneuve February 17, 2015
Test responsible: Alain Zoller
Temp. [°C] & Humidity: 21,6° C; 35 %rel
Maximum certified pilot weight [kg]: 100 kg

Standard: EN 1651

Test standard §: EN 5.3.2.7

Test setup: Flying position before landing: seat board (11) in landing position, leg straps (10) closed.

Anchoring: Attachment points: Both of the main riser attachments attached (3 and 4);


Dummy: Default, hip fixed (7, 8)

Required load in g: 15 g

Min load [N]: 15 000 N

Required test load in kg: **1529 kg**

Min. duration [s]: 5 s




Results

Duration of maintained min. load [s]: **< 5 sec.**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

Graph:

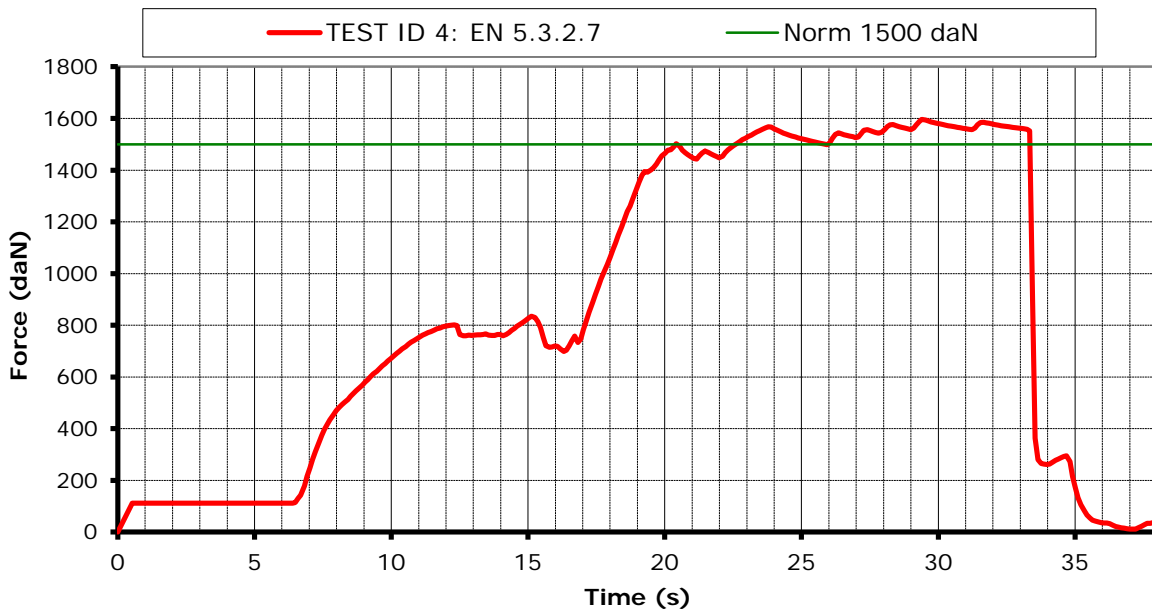




Harness Test **Test ID 8**

Item: Jazz
 Manufacturer: DUDEK Paragliders S.J.
 Test place & date: Villeneuve February 17, 2015
 Test responsible: Alain Zoller
 Temp. [°C] & Humidity: 21,6° C; 35 %rel
 Maximum certified pilot weight [kg]: 100 kg


Standard: EN 1651
 Test standard §: 5.3.2.3
 Test setup: Only one riser attached
 Anchoring: Attachment points: One main riser attachments (3)
 Dummy: Hip fixed (7, 8 -> 12)
 Required load in g: 6 g
 Min load [N]: 6 000 N
 Required test load in kg: **612 kg**
 Min. duration [s]: 10 s



Results

Duration of maintained min. load [s]: **< 10 sec.**
 Any signs of structural failure after this test: **No visible failure**
 Test result: **Passed**

Graph:

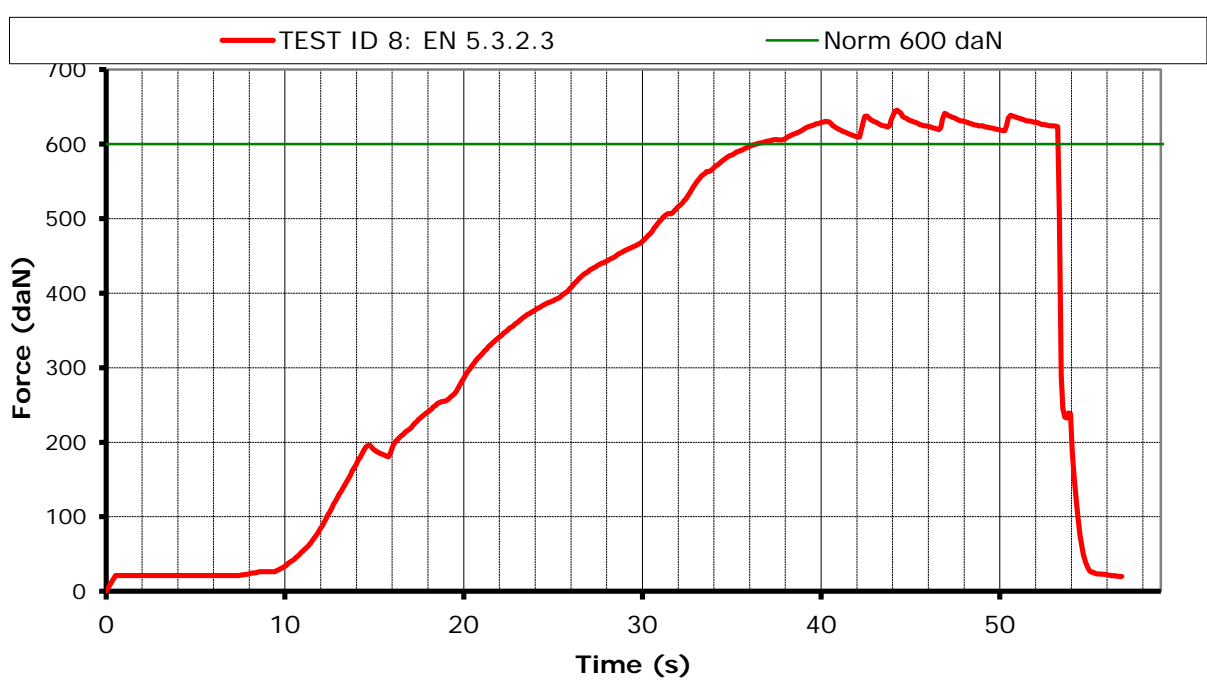




Harness Test

Test ID 10

Item: Jazz
 Manufacturer: DUDEK Paragliders S.J.
 Test place & date: Villeneuve February 17, 2015
 Test responsible: Alain Zoller
 Temp. [°C] & Humidity: 21,6° C; 35 %rel
 Maximum certified pilot weight [kg]: 100 kg

Standard: EN 1651
 Test standard §: 5.3.2.6
 Test setup: Normal flying position in NEGATIF
 Anchoring: Attachment points: ONE of the main riser attachments attached downwards(3 or 4);
 Dummy: Dummy anchored at the head position (9)
 Required load in g: 4.5 g
 Min load [N]: 4500 N
 Required test load in kg: **459** kg
 Min. duration [s]: 10 s




Results

Duration of maintained min. load [s]: **< 10 sec.**

Any signs of structural failure after this test: **No visible failure**

Test result: **Passed**

Graph:

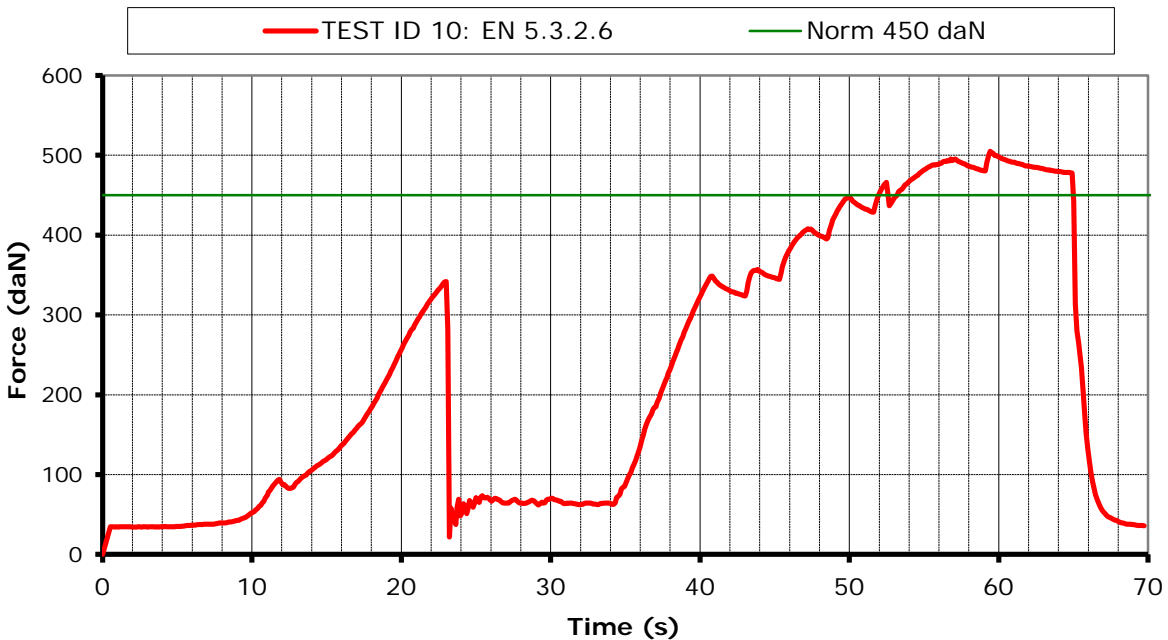




Harness Test

Test ID 11

Item: Jazz
 Manufacturer: DUDEK Paragliders S.J.
 Test place & date: Villeneuve February 17, 2015
 Test responsible: Alain Zoller
 Temp. [°C] & Humidity: 21,6° C; 35 %rel
 Maximum certified pilot weight [kg]: 100 kg


Standard: NfL II 91 / 09
 Test standard §: 4.2.1.c
 Test setup: Pilot upside down flying position
 Anchoring: Attachment points: Both of the main riser attachments attached downwards (3 and 4);
 Dummy: Dummy anchored at the head position (9)
 Required load in g: 6 g
 Min load [N]: 6 000 N
 Required test load in kg: **612 kg**
 Min. duration [s]: 10 s

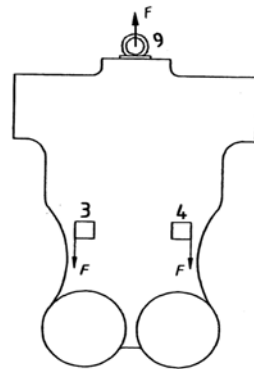

Results

Duration of maintained min. load [s]: **< 10 sec.**
 Any signs of structural failure after this test: **No visible failure**
 Test result: **Passed**

Graph:

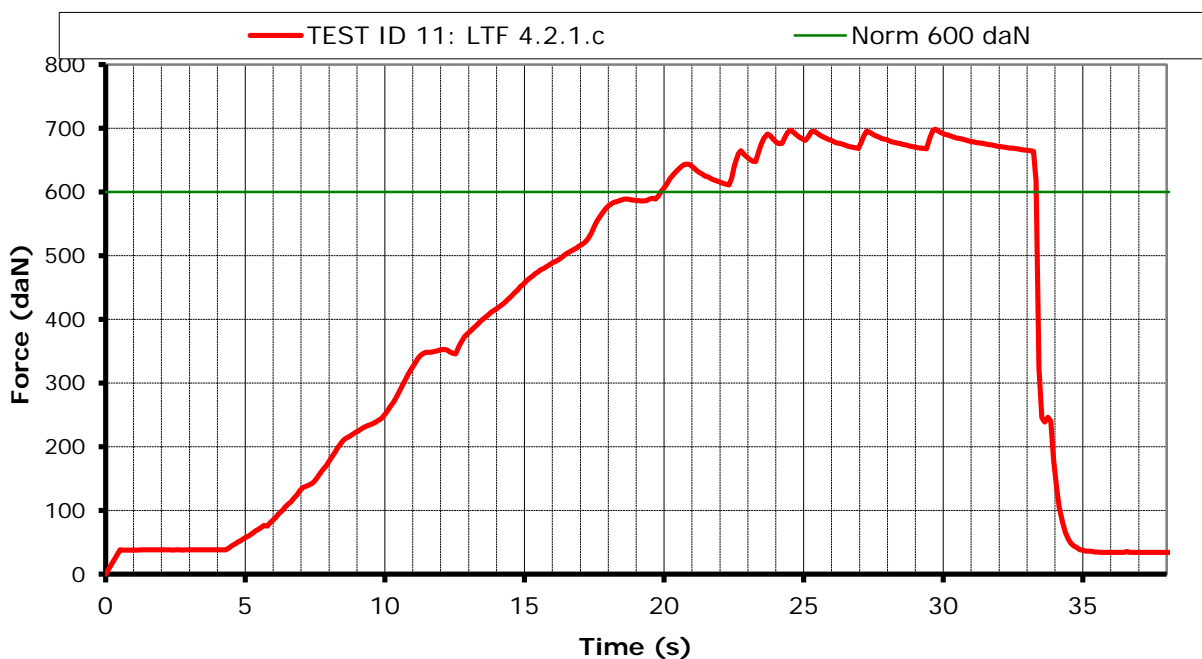





Protector shock test		Test ID Protect
Item:	Jazz	
Manufacturer	DUDEK Paragliders S.J.	
Test place & date:	Villeneuve	February 17, 2015
Test responsible:	Alain Zoller	
Temp. [°C] & Humidity:	21,6° C; 35 %rel	
Maximum certified pilot weight [kg]:	100	kg
Standard	Nfi II 91 / 09	
Test standard §:	5.1.1	
Test setup:	<p>Harness attached to protector test dummy, in a similar way like a real pilot in flight.</p> <p>Impact will be simulated by dropping the dummy from a certain height (with and without reserve).</p> <p>To simulate the "in-flight" conditions, the airbag is inflated with pressurized air equalling an airspeed of 7m/s. Inflation has to be stopped at least 5 sec before impact.</p> <p>Impact will be measured by an accelerometer mounted on the dummy. (Impact measured in g's)</p>	
Requirements:	Minimum height:	1.65 m (between lowest point test dummy and impact surface)
	Impact requirements:	+50g as absolute maximum; +38g during less than 7 msec; +20g during less than 25 msec.
	Repetitions:	The test will be performed 2 times, minimum 1 hour and maximum 2 hours after the first impact (with airbag protectors this pause is not necessary). The 2 Max-values should not differ more than 20%
Results		
Shock test 1:		
Impact at a height of 1.65m:	36.95	} $\Delta < 20\% ?$
Impact duration of + 38 g (if any):	0	
Impact duration of +20 g (if any):	18.48	
Shock test 2:		
Impact at a height of 1.65m:	44.98	} $\Delta < 20\% ?$
Impact duration of + 38 g (if any):	6.56	
Impact duration of +20 g (if any):	17.22	
Test Result:	Passed	



Graph 1:

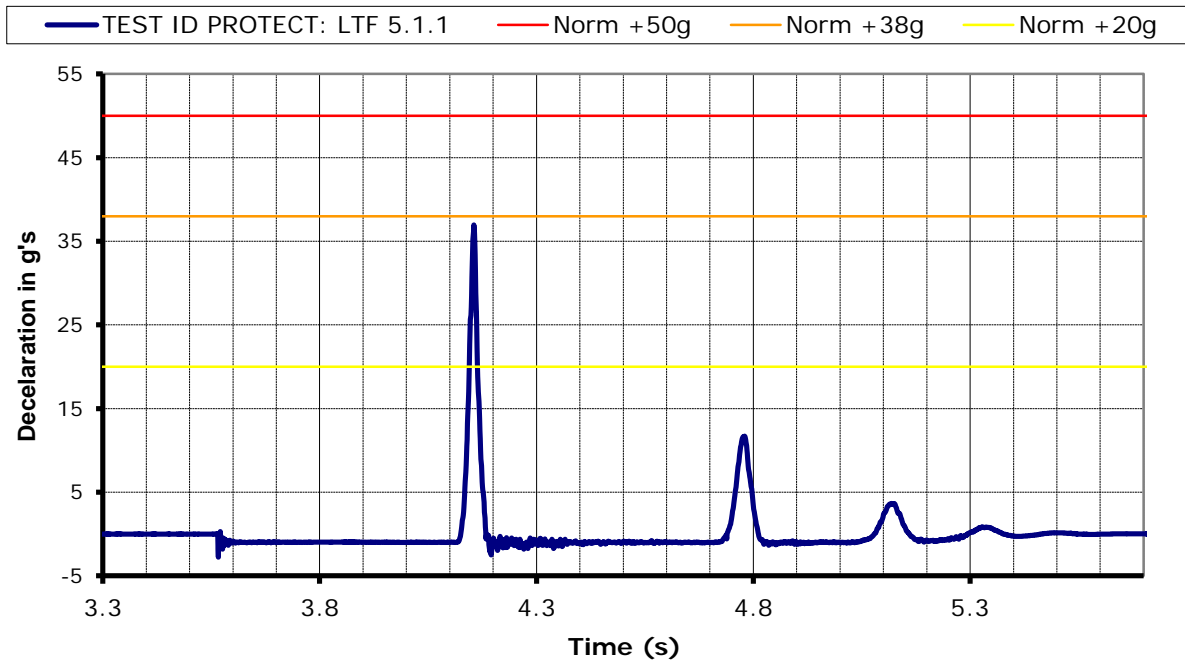

Graph 2:

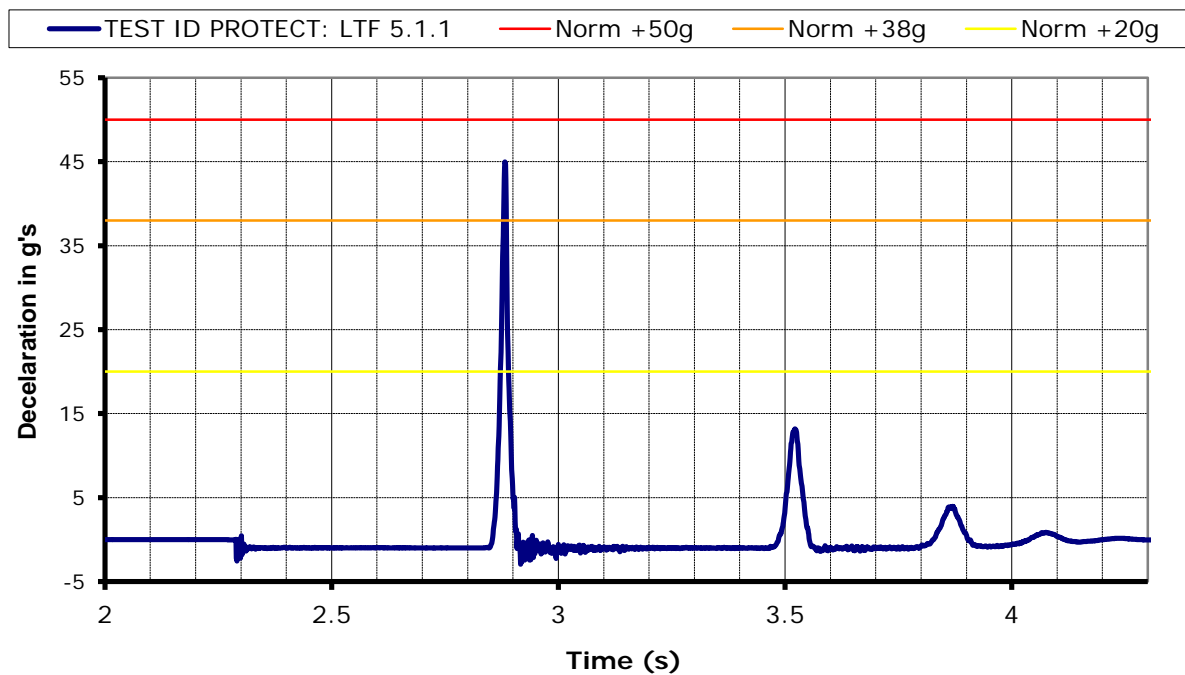



Rescue deployment resistance test		Test ID resc
Item:	Jazz	
Manufacturer	DUDEK Paragliders S.J.	
Test place & date:	Villeneuve	February 17, 2015
Test responsible:	Alain Zoller	
Temp. [°C] & Humidity:	21,6° C; 35 %rel	
Maximum certified pilot weight [kg]:	100	kg
Standard	Nfl II 91 / 09	
Test standard §:	6.1.5	
Test setup:	<p>The deployment of the rescue system has to be ensured in all circumstances, especially with a damaged glider.</p> <p>The pilot has to be able to deploy the rescue chute with a single pull out of the outer container, single handed and in an anatomical favorable direction.</p> <p>In order to simulate this, the test responsible deploys the rescue seated in the harness. In a similar way as in real flight. The deployment resistance is approximately measured by the load cell, which is placed between the hand of the test responsible and the rescue hand grip.</p> <p>On the other hand inadvertent deployment has to be fairly remote. Therefore a shear link has to withstand a minimum load.</p>	
Requirements:	<p>Max force for single hand deployment:</p> <p>Min force to prevent unwanted opening:</p>	<p>approx. 70 N</p> <p>approx. 20 N</p>
Results		
Measured peak to peak required force for deployment [daN]:	2.7 daN	
Comment:	Passed	
Graph:		



Rescue deployment strap strength test

Test ID resc strap

Item: Jazz
Manufacturer DUDEK Paragliders S.J.
Test place & date: Villeneuve February 17, 2015
Test responsible: Alain Zoller
Temp. [°C] & Humidity: 21,6° C; 35 %rel
Maximum certified pilot weight [kg]: 100 kg

Standard EN 12491 & Nfl II 91 / 09

Test standard §: 5.3.2 (EN 12491) & 6.1.8 (LTF)

Test setup:
 The handgrip of the outer container has to be connected to the inner container with a removable loop in a way that it is possible to use the inner container with different types of outer containers.
 The connection between handgrip and inner container has to have sufficient load capacity/structural strength in any situation that may arise during normal operation.
 In order to verify this, the connection is tested on its tensile strength by a default tensile testing setup.
 In addition to this the breaking resistance will also be measured.

Requirements: Min. tensile strenght for 10 s: 700 N (= 70daN)

Results

Duration of maintained load [s]: < 10 sec.

Breaking resistance [daN]: 149.1

Comment: Passed

Graph:

